

Attorney's Docket No 98-906

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Box Patent Application -  
Assistant Commissioner for Patents  
Washington, D. C. 20231

NEW APPLICATION TRANSMITTAL

Transmitted herewith for filing is the patent application of:

Inventor(s): Mark G. Prestoy


**WARNING:** Patent must be applied for in the name(s) of all of the actual inventor(s). 37 CFR 1.41(a) and 1.53(b).

Certification Under 37 CFR 1.10

I hereby certify that this New Application Transmittal and the documents referred to as enclosed therein are being deposited with the United States Postal Service on this date 2/18/99 in an envelope as "Express Mail Post Office to Addressee" mailing label Number EE486105925US addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Lin B Olsen

(typed or printed name of person mailing paper)

  
(Signature of person mailing paper)

**NOTE:** Each paper or fee referred to as enclosed herein has the number of the "Express Mail" mailing label placed thereon prior to mailing. 37 CFR 1.10(b).

**Warning:** Certificate of mailing (first class) or facsimile transmission procedures of 37CFR1.8 cannot be used to obtain a date of mailing or transmission for this correspondence

**PATENT**

For (title): METHOD AND SYSTEM FOR INTERACTIVE MULTIMEDIA

Enclosed are:

- [14 ] pages of specification
- [ 4 ] pages of claims
- [ 1 ] pages of abstract
- [10 ] sheets of drawings.
- [ 2 ] pages of declaration and power of attorney.
- [ 2 ] pages of assignment and assignment recordation form

CLAIMS AS FILED				
	NUMBER FILED	NUMBER EXTRA	RATE	BASIC FEE \$760.00
TOTAL CLAIMS	26 - 20	6 x	\$18.00	108.00
INDEPENDENT CLAIMS	2 - 3	3 x	\$78.00	
MULTIPLE DEPENDENT CLAIMS(S).....ADD			\$260.00	0.00
TOTAL FILING FEE				\$ 868.00

**Warning:** Do not use this transmittal for a completion in the U.S. of an International Application under 35 U.S.C. 371(c)(4) unless the International Application is being filed as a divisional, continuation or a continuation-in-part application.

☒ Please charge my Deposit Account No. 07-2339 in the amount of **\$868.00.** This transmittal letter is submitted in duplicate.

**This transmittal letter is submitted in duplicate.**

Floyd E. Anderson  
Registration No. 33,825  
Attorney for Applicant(s)

c::\msoffice\winword\template\Trnm Doc revised 10/20/97

Attorney Docket No. 98-906

UNITED STATES PATENT APPLICATION

OF

Mark PRESTOY

FOR

METHOD AND SYSTEM FOR INTERACTIVE MULTIMEDIA

## **CROSS-REFERENCE TO RELATED APPLICATIONS**

This application claims the benefit of U.S. Provisional Application No. 60/074965, filed February 18, 1998, the contents of which are incorporated herein by reference.

5

## **BACKGROUND OF THE INVENTION**

### **Field of the Invention**

The present invention relates to video and data networks and, more particularly, to a method and system for delivering interactive multimedia.

10

### **Background of the Art**

With recent advancements in communication network and video server technologies, a growing number of multimedia systems are emerging. These emerging multimedia systems generally can deliver both video (e.g., video on demand) and data (e.g., web based information from the Internet) to about 200 to 400 subscribers located at one or more geographically dispersed subscriber sites, which may include hotels or a multi-dwelling corporate offices.

These emerging multimedia systems, however, have several disadvantages: First, despite the recent advancements in communication network and video server technologies, these emerging systems have limited capacity: i.e., cannot deliver more than 400 concurrent video on demand and high speed data streams to a large number of subscribers. Second, as the number of subscribers at a subscriber site increases, the number of concurrent video streams and data that must be delivered to the subscribers generally increases as well. However, the capacity of these emerging systems cannot be expanded to address this increased demand without a significant redesign of these systems. Third, subscribers generally cannot use the video and data services provided by these systems in an interactive fashion. Finally, these emerging systems have failed to deliver high quality video and data in an integrated fashion because of the diverging network requirements for transporting video and data.

It is therefore desirable to improve upon these emerging multimedia systems.

## **SUMMARY OF THE INVENTION**

30

Methods and systems consistent with the present invention provide an improved

multimedia system that has several advantages over the prior art: First, the improved multimedia system can deliver a large number of concurrent video on demand and high speed data streams, such as 500, 1000 or more concurrent video streams, in an integrated fashion to a large number of subscribers, while assuring a high video quality. Second, subscribers can interact with the system through web-based interactive user interfaces. Third, the system is scalable, i.e. its capacity, such as the number of concurrent video streams and the total duration of the video titles stored, can be increased without redesigning the system. Fourth, the system can monitor and control in a centralized fashion its respective hardware and software modules, thus assuring the quality of video and data services provided to the subscribers.

In accordance with methods and systems consistent with the present invention, a high capacity interactive multimedia system is provided that comprises a video server module that includes a plurality of massively parallel nodes for streaming a plurality of video streams from one or more video titles stored in the video server module, a web server that stores data, a high capacity transport system for transporting the video streams and the data to a plurality of clients, and a set of display devices connected to the clients, respectively, for displaying the video streams and the data. The data stored in the web server may include web pages through which subscribers interact with the interactive multimedia system. The system also includes a controller for controlling and monitoring the video server module, the web server, the high capacity transport system, and the clients.

High capacity is defined herein to include delivery of more than 400 concurrent video on demand streams to a large number of clients. Alternatively, super high capacity is defined herein to include delivery of 1000 or more concurrent video on demand streams to a large number of clients. The clients may include set top boxes, personal computers, or other computing devices capable of receiving video and data streams on high speed bidirectional connections and displaying the streams on display monitors. A high speed connection is defined herein to include connections that transport integrated video and data streams at speeds of 25 Mbps or greater.

This summary and the following description of the invention should not restrict the scope of the claimed invention. Both provide examples and explanations to enable others to practice the invention. The accompanying drawings, which form part of the description of the invention,

show several embodiments of the invention, and together with the description, explain the principles of the invention.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

5           In the Figures:

          Figure 1 is a block diagram of an interactive multimedia system in accordance with methods and systems consistent with the present invention;

          Figure 2 is a block diagram of a video server module in accordance with methods and systems consistent with the present invention;

10           Figure 3 is a block diagram of a node in a video server module in accordance with methods and systems consistent with the present invention;

          Figure 4 is a block diagram of a set top box in accordance with methods and systems consistent with the present invention;

15           Figure 5 is a block diagram of a web server in accordance with methods and systems consistent with the present invention;

          Figure 6 is a flow chart of the steps performed by a set top box, a system controller, a web server, and a video server in an interactive multimedia system in accordance with methods and systems consistent with the present invention;

20           Figure 7 is a block diagram of a listing of programs displayed on a display monitor in an interactive multimedia system in accordance with methods and systems consistent with the present invention;

          Figure 8 is a block diagram of a listing of movie categories displayed on a display monitor in an interactive multimedia system in accordance with methods and systems consistent with the present invention;

25           Figure 9 is a block diagram of a listing of news and weather information displayed on a display monitor in an interactive multimedia system in accordance with methods and systems consistent with the present invention; and

          Figure 10 is a block diagram of a listing of an on-line shopping services displayed on a display monitor in an interactive multimedia system in accordance with methods and

systems consistent with the present invention.

## DETAILED DESCRIPTION

The following description of embodiments of this invention refers to the accompanying drawings. Where appropriate, the same reference numbers in different drawings refer to the same or similar elements.

In accordance with methods and systems consistent with the present invention, a high capacity interactive multimedia system is provided that can deliver a large number of concurrent video and data streams, such as 500 or more, in an integrated fashion to a plurality of subscribers located at one or more subscriber sites. A video server module in the system generates a plurality of video streams, which are transported via a high capacity transport system to a plurality of clients located at a subscriber site. A web server in the system stores data, such as web pages, which are also transported via the high capacity transport system to the clients. By accessing the web pages, a plurality of subscribers interact with the system via the clients. The interactive multimedia system controls and monitors in a centralized fashion the hardware and software components of the system, thus assuring the quality of the video and data services provided to the subscribers.

Figure 1 is a block diagram of an interactive multimedia system (IMS) 100 in accordance with methods and systems consistent with the invention. IMS 100 comprises a controlling office 110, which connects via a high capacity transport system 150 to a subscriber site 160 or, alternatively, to a plurality of subscriber sites. Controlling office 110 includes a content provider module 120, a management module 130, and a video server module 140, all interconnected via a LAN switch 145. LAN switch 145 and video server module 140 each connect to high capacity transport system 150. Controlling office 110 may also interface via LAN switch 145 with an Internet Protocol (IP) network 155 such as the Internet.

High capacity transport system 150 comprises an ATM network 152 and a network access module 170. ATM network 152 includes one or more ATM switches, which interface with video server module 140 and LAN switch 145 in controlling office 110. Network access module 170, which resides in subscriber site 160, connects to ATM network 152.

Subscriber site 160, which may be, for example, a hotel or other dwelling, comprises a



customer premises module 180 and an operator console 190, all connected to network access module 170.

## CONTENT PROVIDER MODULE

5           Content provider module 110 comprises a real-time encoder 122, an off-line encoder 114, a personal computer 126, and an authoring console 128. Real-time encoder 122 includes, for example, a Lucent SE-1<sup>TM</sup> digital video system manufactured by Lucent Technologies, Inc. Real-time encoder 122 compresses video streams in Motion Picture Experts Group-2 (MPEG-2) format at a rate of 1.5 to 15 Mbps. An input of real-time encoder 122 may receive real-time  
10       video, such as video from a video conference or a live broadcast. An output of real-time encoder 122 connects to video server module 140, which stores the compressed video for real-time or off-line transmission to set top boxes 182<sub>1</sub>-182<sub>M</sub> or personal computers 186<sub>1</sub>-186<sub>M</sub>.

          Off-line encoder 124 includes, for example, an Optivision<sup>TM</sup> video recorder/player (e.g., model VS-40), which compresses video streams in MPEG-2 or MPEG-1 formats. Off-line  
15       encoder 124 may include a 9-Gigabits hard drive, a 4xCD recorder, or an 8mm tape drive. Off-line encoder 124 connects to LAN Switch 145 using a standard 10baseT or 100baseT network port. An operator may locally control the operation of off-line encoder 124 via an attached keyboard and a mouse. Off-Line encoder 104 may receive input from a video camera, laser disc  
20       player, or a Video Cassette Recorder (VCR). The input may be in form of digital frames, which are stored on a D1 tape or comply with a conventional encoding standard, such as National TV Standardization Committee (NTSC), Phase Alternate Line (PAL), or S-VHS standards.

          Authoring console 128 may be a personal computer, which may include Windows NT<sup>TM</sup> operating system developed by Microsoft, Netscape Navigator Gold<sup>TM</sup> software developed by Netscape, and Ulead PhotoImpact<sup>TM</sup> software developed by Ulead Systems. A system developer  
25       may use the Netscape Navigator Gold<sup>TM</sup> software to develop, publish, and test web pages, which function as the graphical user interface for IMS 100. The system developer may use the Ulead PhotoImpact<sup>TM</sup> software to create, for example, graphics on the web pages. After testing the web pages, the system developer may download the web pages onto web server 134, where the web pages may be accessed by customer premise module 180.

## VIDEO SERVER MODULE

Figure 2 is a block diagram of video server module 140 in accordance with methods and systems consistent with the invention. Video server module 140 may include, for example, a MediaCUBE 3000™ video server manufactured by nCUBE. As shown, video server  
5 module 140 comprises N nodes 200<sub>1</sub>-200<sub>N</sub>, which are interconnected in a Hypercube configuration and connect via a bus 210 to a disk storage 220. The number of nodes 200<sub>1</sub>-200<sub>N</sub>, N, may be in the range of 1 to 10000, and may be configured based on the number of video streams that must be concurrently delivered to subscriber site 160 and the bit rate of the video streams. The maximum number of concurrent video streams may be increased by increasing the  
10 number of nodes 200<sub>1</sub>-200<sub>N</sub>.

Disk storage 220 includes an array of K hard disks 220<sub>1</sub>-220<sub>K</sub>, which store video titles in stripped form and in MPEG-2 format at, for example, 3-6 Mbps encoding rate. The number of hard disks 220<sub>1</sub>-220<sub>K</sub>, K, may be in the range 1 to 256, and may be configured based on the total duration of the video titles that must be stored. To provide multiple, concurrent, time displaced  
15 access to a single video title, each video title is divided into small segments (called stripes), which are stored throughout disks 220<sub>1</sub>-220<sub>K</sub>. The total duration of video titles stored may increased by increasing the number hard disks 220<sub>1</sub>-220<sub>K</sub>.

Nodes 200<sub>1</sub>-200<sub>N</sub> retrieve the stripped video associated with video titles from disks 220<sub>1</sub>-220<sub>K</sub>, and recombine the retrieved stripped video into contiguous video streams. Nodes 200<sub>1</sub>-  
20 200<sub>N</sub> then convert the video streams into ATM format for transporting the video streams over ATM network 152.

Figure 3 is a block diagram of a node, for example node 200<sub>1</sub>, in video server module 140 in accordance with methods and systems consistent with the invention. Node 200<sub>1</sub> comprises a processor 300, which connects via a bus 310 to a memory 320, an ATM interface module 330,  
25 and a Small Computer System Interface module (SCSI interface) 340.

Memory 320 includes an operating system 324 and a video server program 322, which are executed by processor 300. Operating system 324 may include MediaCUBE 3000™ operating system software developed by nCUBE. Video server program 322 may include, for example, Oracle Video Server™ software developed by Oracle, which retrieves stripped video

titles from disks 220<sub>1</sub>-220<sub>K</sub>, and recombines the retrieved stripped video titles into contiguous video streams using the Real Time Streaming Protocol (RTSP).

ATM interface module 330, which connects to high capacity transport system 150 via a 155 Mbps (OC-3) or 622 Mbps (OC-12) link, formats each video stream into a plurality of ATM cells, and transmits the cells via ATM network 150 on a pre-established bidirectional 25 Mbps connection using, for example, the ATM Adaptation Layer 5 (AAL5) or AAL1 protocols. The quality of service parameters, which may include cell delay variation, cell transfer delay, and cell loss ratio, may be predetermined based on the desired quality of the video that must be delivered to customer premise module 180.

SCSI interface module 340 includes a 16 bit channel with a 20 Mbps throughput for retrieving stripped video titles from hard disks 220<sub>1</sub>-220<sub>K</sub> using the Small Computer System Interface (SCSI) protocol.

#### NETWORK ACCESS MODULE

Network access module 170 includes ATM switch 171, which connects via, for example, bidirectional STM-1 multi-mode fiber links to ATM switches 172 and 173. ATM switch 171 may be a FORE ASX-1000<sup>TM</sup> ATM switch manufactured by FORE Systems, Inc. ATM 171 may include, for example, a 10 Gbps switch fabric with 16 line card slots.

ATM switches 172 and 173 connect via bidirectional 25 Mbps ATM links or via bidirectional 10 to 100 Mbps Ethernet links to customer premise module 180. In the case of 25 Mbps ATM links, ATM switches 172 and 173 may each include a FORE ASX-200WG-D1<sup>TM</sup> ATM switch manufactured by FORE Systems, Inc. Furthermore, ATM switches 172 and 173 each may include, for example, a 2.5 Gbps switch fabric with 4 line card slots. A system administrator may configure ATM switches 171-173 via system controller 132.

#### CUSTOMER PREMISE MODULE

Referring back to Figure 1, customer premise module 180 includes a plurality of clients such as, set top boxes 182<sub>1</sub>-182<sub>M</sub> and personal computers 186<sub>1</sub>-186<sub>M</sub>. A system administrator assigns to each of set top boxes 182<sub>1</sub>-182<sub>M</sub> and personal computers 186<sub>1</sub>-186<sub>M</sub> a unique IP

address, a Virtual Path Identifier (VPI), and a Virtual Circuit Identifier (VCI), and stores the same in a network database in system controller 132. A VPI and VCI combination uniquely identifies a pre-established bidirectional 25 Mbps ATM connection, which is dedicated to each of set top boxes 182<sub>1</sub>-182<sub>M</sub> and personal computers 186<sub>1</sub>-186<sub>M</sub>.

5           Figure 4 is a block diagram of a set top box, for example set top box 182<sub>1</sub>, in accordance with methods and systems consistent with the invention. Set top box 182<sub>1</sub> may be an Online Media STB2<sup>TM</sup> manufactured by Acorn. As shown, set top box 182<sub>1</sub> comprises a processor 400, which connects via a bus 410 to a memory 420, a decoder 430, an input device interface 440, an output device 450, and an ATM interface module 460.

10           Memory 420 includes a browser program 422, a video client program 424, and an operating system 426, which are executed by processor 400. Browser program 422 may include a web browsing software, such as the Lite<sup>TM</sup> web browsing software developed by Acorn.

          Browser program 422 may communicate with web server 124 using the Hypertext Transfer Protocol (HTTP). Browse program 422 may retrieve from web server 124 data files  
15   526<sub>1</sub>-526<sub>P</sub> (e.g., web pages), which may be in Hypertext Markup Language (HTML) format and may include text, graphics, audio, and video. The web pages, which serve as a graphical user interface, may include lists of video titles indexed by actors, directors, category (e.g, western, suspense, comedy, or drama) and lists of information such as, weather and news, on-line shopping, interactive games, and broadcast video.

20           Browser program 422 may also communicate via web server 134 with IP network 155, and retrieve web pages from web sites that can be accessed via IP network 155. Browser program 422 may then display the retrieved web pages via output device interface 450 on a display monitor.

          Video client program 424 receives via ATM interface module 460 a video stream on a  
25   pre-established bidirectional 25 Mbps connection in ATM network 152, decodes the video stream using decoder 430, and displays the video stream via output device interface 450 on a display monitor. Furthermore, video client program 424 formats video control commands, for example Play, Forward, Reverse, Stop, and Pause commands, which are received via input device interface 440, and sends the commands via the pre-established connection to video server

module 130 using, for example, the Oracle Media Net™ protocol.

Input device interface 440 interfaces with, for example, a remote control device, a keyboard, or a joystick for receiving subscriber commands. A subscriber may interact with set top box 182<sub>1</sub> via, for example, a remote control device by moving a cursor to a highlighted text or object and clicking on the text or the object. Browser program 422 and video client  
5 program 424 interpret the clicking action as a command or request, which ATM interface module 460 formats into one or more ATM cells and transmits to controlling office 110.

Output device interface 450 interfaces with a display monitor, such as a television set or a display monitor, for displaying data and video received, respectively, by browser program 422  
10 and video client program 424.

In addition, set top box 182<sub>1</sub> may include a Macrovision™ chip set manufactured by Macrovision for preventing a subscriber at subscriber site 160 from taping or recording a video stream received by set top box 182<sub>1</sub>.

Personal computers 186<sub>1</sub>-186<sub>M</sub> may include any computer, such as IBM compatible PCs  
15 or Macintosh PCs. Each personal computer 186<sub>1</sub>-186<sub>M</sub> may include Windows NT™ operating system developed by Microsoft, Macintosh™ operating system developed by Apple Computer, Inc., or Netscape® Navigator™ web browsing software developed by Netscape.

In addition, each personal computer 186<sub>1</sub>-186<sub>M</sub> includes a Network Interface Card (NIC) and software for receiving a video stream on a pre-established 25 Mbps ATM connection or a 10  
20 to 100 Mbps Ethernet connection dedicated to the personal computer, and for sending video control commands via the pre-established connection to video server module 140.

Using the Netscape® Navigator™ web browsing software, each personal computer 186<sub>1</sub>-186<sub>M</sub> may communicate with web server 134 using the HTTP protocol, and retrieve web pages from web server 134 and other web sites in the Internet.

25

## MANAGEMENT MODULE

Referring back to Figure 1, management module 130 includes system controller 132 and web server 134, both of which connect to LAN switch 145. System controller 132, which may be a SUN SPARC™ workstation manufactured by SUN Microsystems, Inc., includes a UNIX™

operating system and a Hewlett Packard OpenView™ (HP OpenView) software developed by Hewlett Packard. System controller 132 monitors, for example, web server 134, video server module 140, ATM network 152, network access module 170, and set top boxes 182<sub>1</sub>-182<sub>M</sub>.

5 System controller 132 monitors each module, for example set top boxes 182<sub>1</sub>-182<sub>M</sub>, video server module 140, and network access module 170, by sending at fixed intervals echo messages to each module using the Simple Network Management Protocol (SNMP). When a module does not respond to an echo message, system controller 132 determines a fault condition. When system controller 132 detects a fault condition, it notifies a system administrator by displaying a color coded fault indication on a display monitor and by adding an entry to a fault log.

10 Figure 5 is a block diagram of web server 134 in accordance with methods and systems consistent with the present invention. As shown, web server 134 comprises a processor 500, which connects via a bus 510 to memory 520, secondary storage 530, ATM interface module 540, IP interface module 550, and input/output interface 560.

15 Memory 520 comprises a web server program 522, an operating system 524, a set of data files 526<sub>1</sub>-526<sub>p</sub>, and a subscriber database 528. Web server program 522 and operating system 524 include sets of instructions in the form of software, which processor 500 executes. Web server program 522 may provide access to data files 526<sub>1</sub>-526<sub>p</sub>, verify subscriber authorization when requesting access to data files 526<sub>1</sub>-526<sub>p</sub>, send subscriber selections for video titles to video server module 140, and function as a gateway for accessing IP network 155, which  
20 subscribers may access via set top boxes 182<sub>1</sub>-182<sub>M</sub> and personal computers 186<sub>1</sub>-186<sub>M</sub>.

Operating system 524 may include a Windows NT™ operating system developed by Microsoft. Data files 526<sub>1</sub>-526<sub>p</sub>, which may be in HTML format, include listings of video titles by category, listings of information such as, weather and news, and listings of services, for example, on-line shopping and access to the Internet.

25 Subscriber database 528 includes an entry for each subscriber in subscriber site 160, where each entry identifies a particular level of access to data files 526<sub>1</sub>-526<sub>p</sub>. For example, an entry may restrict a subscriber's access to a subset or none of data files 526<sub>1</sub>-526<sub>p</sub>.

Secondary storage 530 comprises a disk drive and a tape drive or CD Read Only Memory (ROM). From the tape drive or CD ROM, software and data may be loaded onto the disk drive,

which can then be copied into memory 510. Similarly, software and data in memory 510 may be copied onto the disk drive, which can then be loaded onto the tape drive or CD ROM.

ATM interface module 540 comprises hardware and software or firmware for sending and receiving ATM cells over ATM network 152.

5 IP interface module 550 comprises hardware and software or firmware for sending and receiving IP messages over IP network 155.

Input/output interface 560 comprises hardware and software for interfacing an input and an output device such as, a keyboard and a display monitor, respectively. A system administrator may add, delete, and update entries in subscriber database 528 via input/output interface 560. In  
10 addition, the system administrator may also add, delete, and update entries in subscriber database 528 via operator console 190, which communicates with web server 134 using a TCP/IP protocol.

Figure 6 is a flow chart of the steps performed by a client, for example, set top box 182<sub>1</sub>, system controller 132, web server 134, and video server module 140 in accordance with methods  
15 and systems consistent with the present invention. When a subscriber turns on set top box 182<sub>1</sub>, operating system 426 in set top box 182<sub>1</sub> boots up and sends a signal to system controller 132, notifying system controller 132 that set top box 182<sub>1</sub> is on (step 600). In response to the signal, system controller 132 downloads pre-assigned IP address, VCI, and VPI information to set top box 182<sub>1</sub> (step 610).

20 System controller 132 then configures set top box 182<sub>1</sub> by downloading web browser program 422 into set top box 182<sub>1</sub> using Network File System (NFS) protocol over TCP/IP protocol (step 620). After system controller 132 downloads web browser program 422 into set top box 182<sub>1</sub>, operating system 426 in set top box 182<sub>1</sub> starts up web browser program 422.

Using the HTTP protocol, web browser program 422 then sends a request to web  
25 server 134 to retrieve a data file 526<sub>1</sub>-526<sub>p</sub> that includes a home page (step 630). After verifying the access level of set top box 182<sub>1</sub> from subscriber data base 528, web server program 522 in web server 134 downloads the home page into set top box 182<sub>1</sub>. Web browser program 422 then displays the home page on a display monitor attached to set top box 182<sub>1</sub>.

Figure 7 illustrates a home page 700 in accordance with methods and systems consistent

with the invention. Home page 700 may include a listing of available programs, such as movies, news & weather, on-line shopping, interactive games, and access to the Internet.

The subscriber then navigates through the one or more web pages and makes a selection by clicking on a text or a graphical object on a web page (step 640). For example, when the  
5 subscriber clicks on the text "Movies" in home page 700, web browser program 422 retrieves from web server 134 and displays a listing of categories of video titles 800 (shown in Figure 8) from which the subscriber can make a selection. Alternatively, when the subscriber clicks on the text "News & Weather" in home page 700, web browser program 422 retrieves from web  
server 134 and displays a listing of news and weather programs 900 (shown in Figure 9), or when  
10 the subscriber clicks on the text "On-Line Shopping," web browser program 422 retrieves and displays a listing of stores 1000 (shown in Figure 10).

After the subscriber selects a particular video title, web browser program 422 sends the selection to web server 134 (step 650). Web server program 522 in web server 134 then sends  
via LAN switch 145 to video server module 140 a request, identifying the selected video title and  
15 the IP address of set top box 182<sub>1</sub> (step 660).

Video server program 322 in video server module 140 sets up a video session with set top  
box 182<sub>1</sub> by mapping the IP address of set top box 182<sub>1</sub> to a VCI and VPI combination, which  
uniquely identifies a bidirectional 25 Mbps connection in ATM network 152, which a systems  
administrator has pre-allocated to set top box 182<sub>1</sub> (step 670). Video server program 322 may  
20 perform the mapping by using the IP address as an index into a pre-configured address table in video server module 140.

Video server program 322 retrieves the selected video title, which is stripped in form of  
smaller segments across disks 220<sub>1</sub>-220<sub>k</sub>, and recombines the retrieved segments into contiguous  
video streams using the Real Time Streaming Protocol (RTSP) (step 680). Video server  
25 program 322 then sends the video stream to set top box 182<sub>1</sub> on the pre-allocated bidirectional  
connection using the Oracle Media Net™ protocol over MPEG-2 and AAL5 protocols.

Video client program 424 in set top box 182<sub>1</sub> receives via ATM interface module 460 the  
video stream, decodes the video stream using decoder 430, and displays the decoded video  
stream via output device interface 450 on a display monitor (step 690). Furthermore, video client



program 424 may receive via input device interface 440 video control commands from a remote control device (step 695). The control commands may include Play, Forward, Reverse, Stop, and Pause commands. Video client program 424 then formats and sends the commands via the pre-allocated bidirectional connection to video server module 140 using the Oracle Media Net™ protocol. When video server module 140 receives a Stop command, video server program 322 terminates the video session.

While it has been illustrated and described what are at present considered to be preferred embodiments and methods of the present invention, it will be understood by those skilled in the art that various changes and modifications may be made, and equivalents may be substituted for elements thereof without departing from the true scope of the invention.

In addition, many modifications may be made to adapt a particular element, technique or implementation to the teachings of the present invention without departing from the central scope of the invention. Therefore, it is intended that this invention not be limited to the particular embodiments and methods disclosed herein, but that the invention include all embodiments falling within the scope of the appended claims.

## WHAT IS CLAIMED IS:

1. An interactive multimedia system, comprising:  
a massively parallel video server for streaming a plurality of video streams;  
a plurality of clients for receiving the plurality of video streams;  
a high capacity transport system for transporting the video streams from the massively parallel video server to the plurality of clients.
2. The interactive multimedia system of claim 1, further comprising:  
a set of display devices connected to the plurality of clients, respectively, for displaying the video streams.
3. The interactive multimedia system of claim 1, further comprising:  
an encoder for encoding video and for storing the encoded video in the massively parallel video server.
4. The interactive multimedia system of claim 1, further comprising:  
a controller for monitoring the massively parallel video server, the high capacity transport system, and the plurality of clients.
5. The interactive multimedia system of claim 1, further comprising a web server for storing data and sending the data via the high capacity transport system to the plurality of clients.
6. The interactive multimedia system of claim 1, wherein the massively parallel video server includes a plurality of nodes and each of the plurality of nodes comprises:  
a video server program for streaming one or more of the video streams from one or more video titles stored in a plurality of disks;  
an interface module for formatting the video streams into cells and transmitting the cells on the high capacity transport system;  
a disk controller for retrieving the video titles from the plurality of disks; and

a processor for running the video server program.

7. The interactive multimedia system of claim 1, wherein the high capacity transport system comprises one or more asynchronous transfer mode (ATM) switching systems.

8. The interactive multimedia system of claim 1, wherein the high capacity transport system comprises pre-established connections associated with the plurality of clients, respectively.

9. The interactive multimedia system of claim 1, wherein the high capacity transport system comprises pre-established bidirectional connections associated with the plurality of clients, respectively.

10. The interactive multimedia system of claim 1, wherein each of the plurality of clients comprises:

a browser program for retrieving the data from the web server;

a video client program for receiving one of the video streams and for controlling the video stream; and

a processor for executing the browser program and the video client program.

11. The interactive multimedia system of claim 1, wherein one or more of the plurality of clients includes a set top box.

12. The interactive multimedia system of claim 1, wherein one or more of the plurality of clients includes a personal computer.

13. The interactive multimedia system of claim 3, wherein the encoder comprises a real-time encoder for encoding real-time video.

14. The interactive multimedia system of claim 3, wherein the encoder comprises an off-line encoder for encoding off-line video.

15. The interactive multimedia system of claim 5, wherein the web server interfaces an Internet Protocol (IP) network.

16. The interactive multimedia system of claim 5, wherein the data is in Hypertext Markup Language (HTML) format.

17. A method for delivering interactive multimedia to a plurality of subscribers at a subscriber site, said method comprising the steps of:

streaming a plurality of video streams from one or more video titles stored in a massively parallel video server; and

transporting the video streams to a plurality of clients via a high capacity transport system.

18. The method of claim 17, further comprising the step of:

displaying the video streams on a plurality of display monitors connected to the plurality of clients, respectively.

19. The method of claim 17, further comprising the step of:

encoding video and storing the encoded video as a video title in the massively parallel video server.

20. The method of claim 17, further comprising the step of:

monitoring the massively parallel video server, the high capacity transport system, and the plurality of clients.

21. The method of claim 17, wherein the transporting step comprises the step of:

transporting the video streams on pre-established connections to the plurality of clients.

22. The method of claim 17, wherein the transporting step comprises the step of:  
transporting the video streams on pre-established bidirectional connections to the plurality of clients.

23. The method of claim 17, wherein the transporting step comprises the step of:  
transporting data stored in a web server via the high capacity transport system to the plurality of clients.

24. The method of claim 19, wherein the encoding step comprises the step of  
encoding real-time video.

25. The method of claim 19, wherein the encoding step comprises the step of  
encoding off-line video.

26. The method of claim 23, further comprising the step of:  
displaying the data on a plurality of display monitors connected to the plurality of clients, respectively.

## ABSTRACT

A high capacity interactive multimedia system is provided that can deliver large number of concurrent video on demand and high speed data streams in an integrated fashion to a plurality of subscribers located at one or more subscriber sites. A video server module in the system generates a plurality of video on demand streams, which are transported via a high capacity transport system to a plurality of clients located at a subscriber site. A web server in the system stores data, such as web pages, which are also transported via the high capacity transport system to the clients. By accessing the web pages, a plurality of subscribers interact with the system via the clients. The interactive multimedia system controls and monitors in a centralized fashion the hardware and software components of the system, thus assuring the quality of the video and data services provided to the subscribers.

Copyright © 2000 by International Business Machines Corporation. All rights reserved.

100

FIG. 1 is a block diagram of a system for providing video content to a subscriber site.

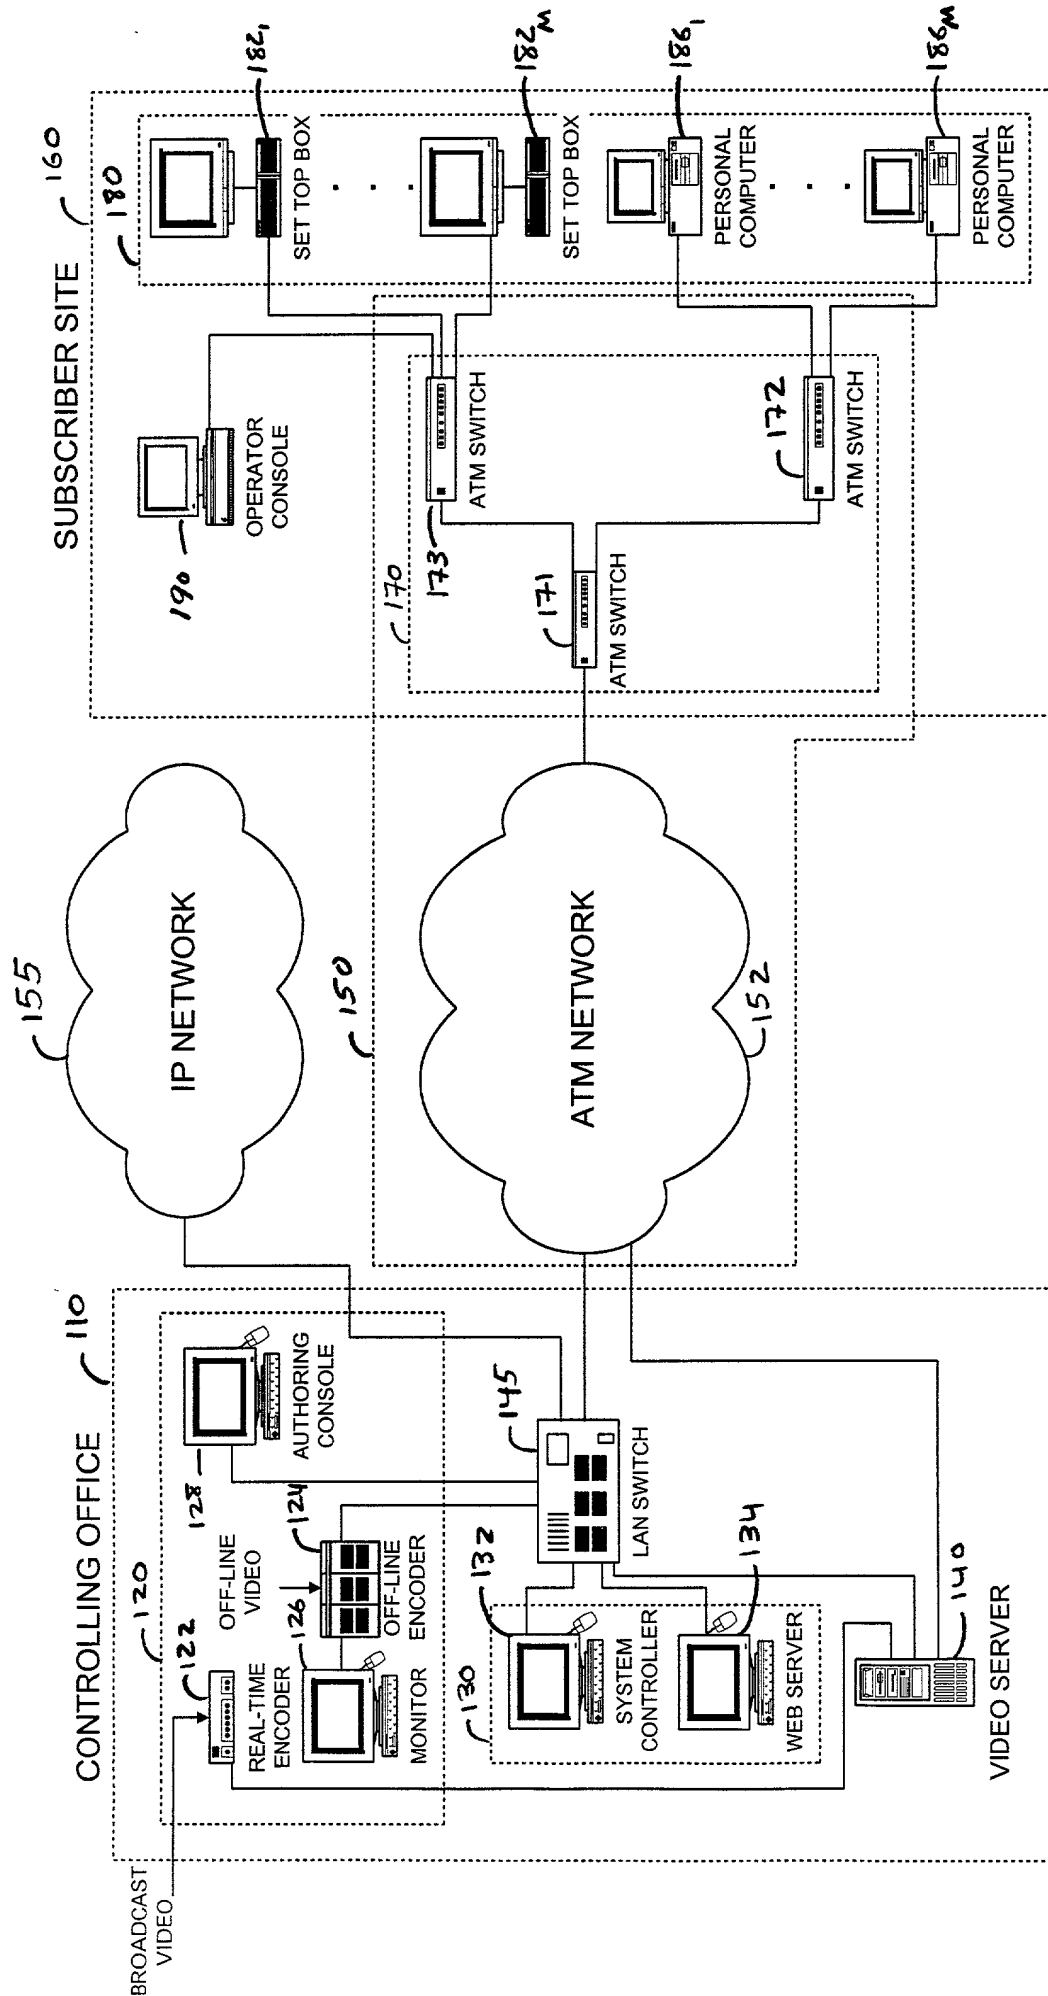


FIGURE 1





200, ↗

FIG. 3 is a block diagram of a system 200.

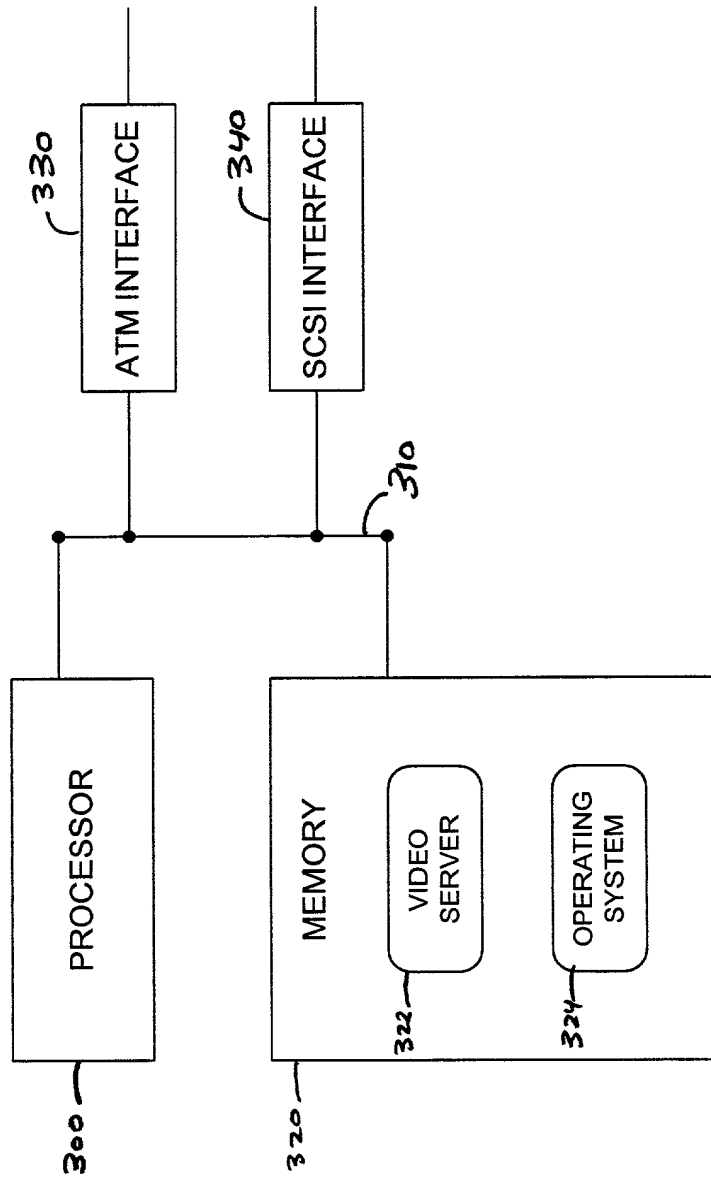


FIGURE 3

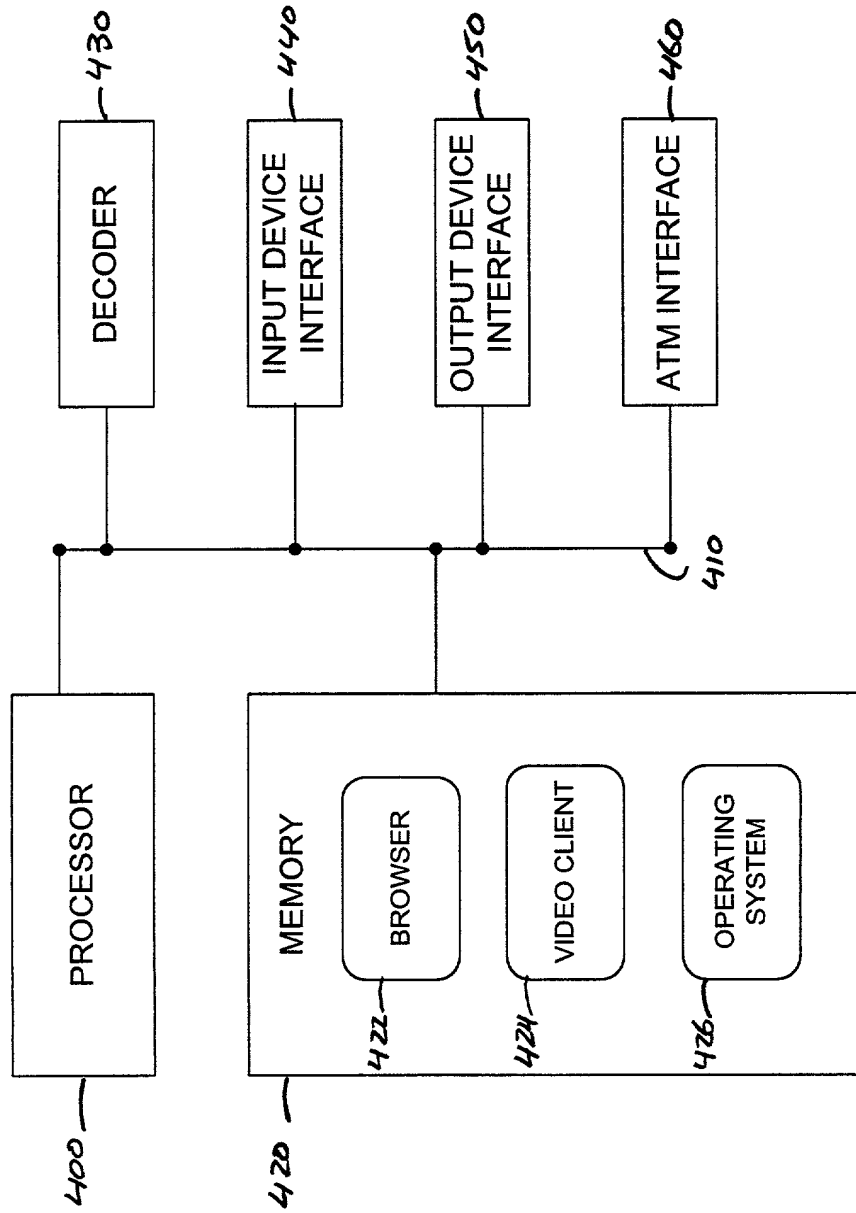


FIGURE 4

134 →

FIG. 5 is a block diagram of a system 500.

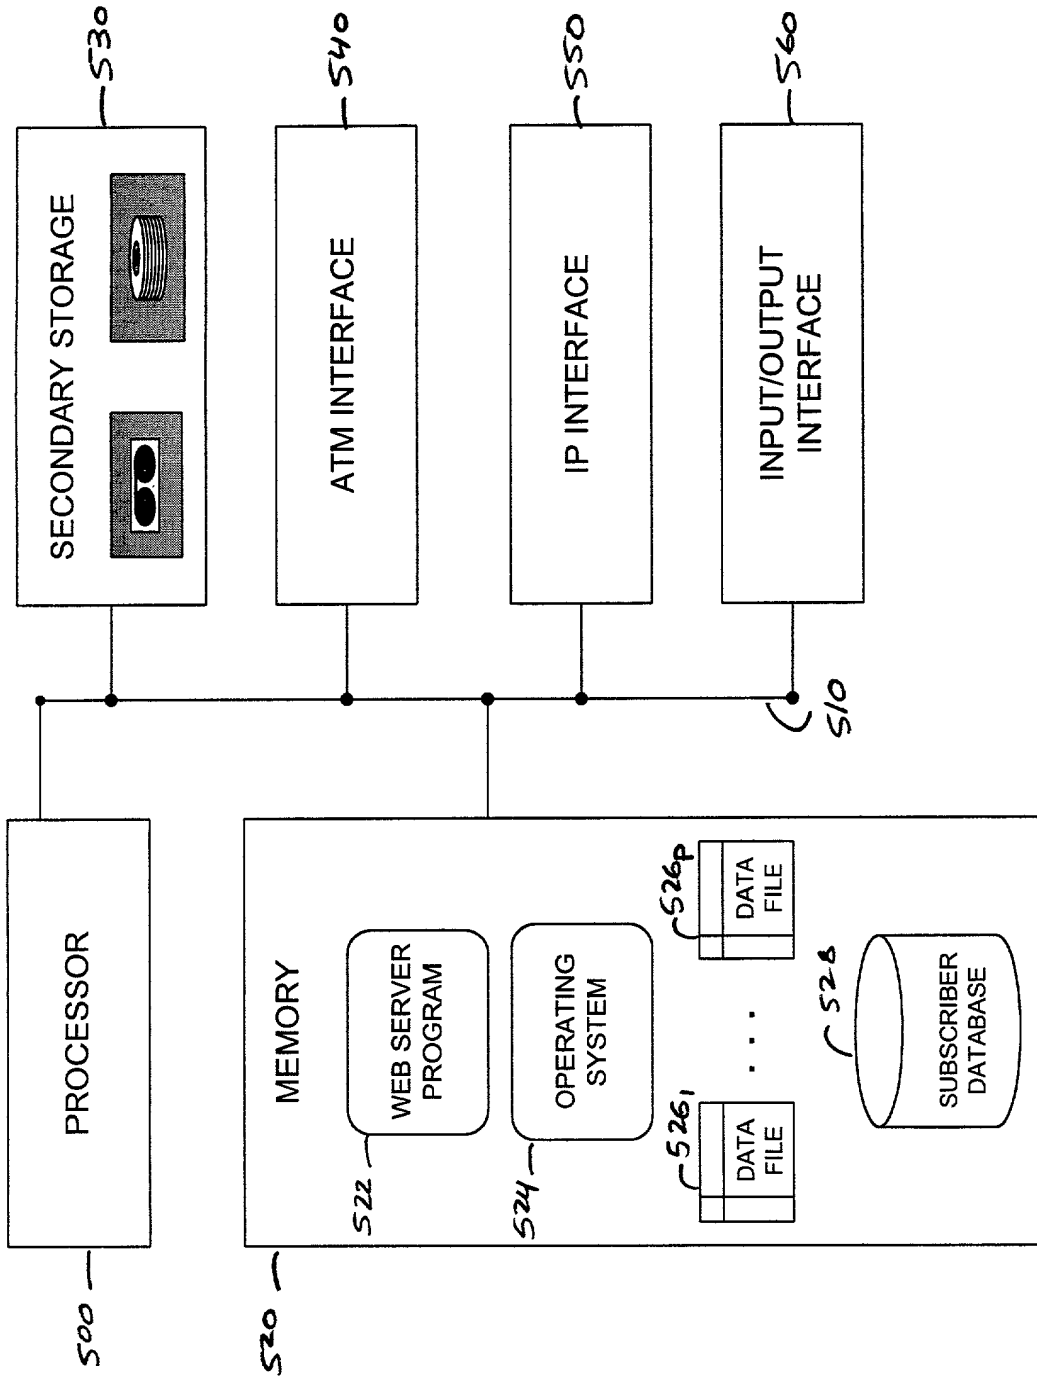


FIGURE 5

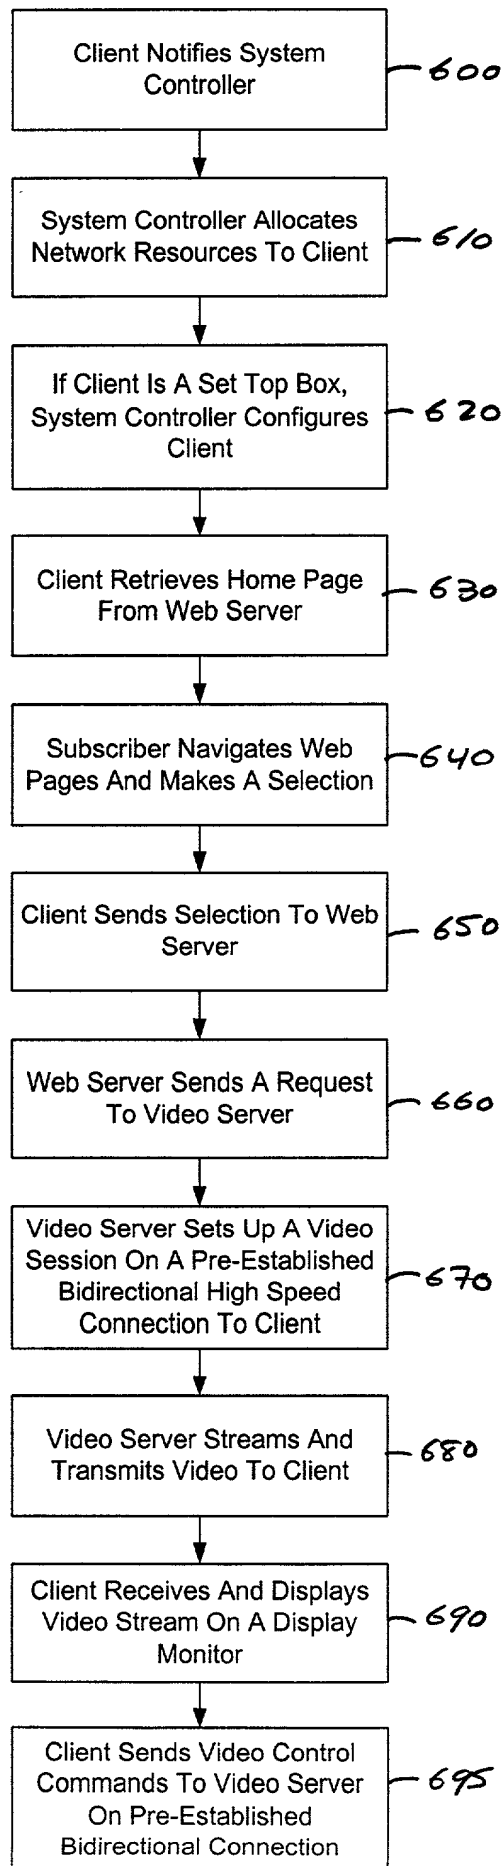
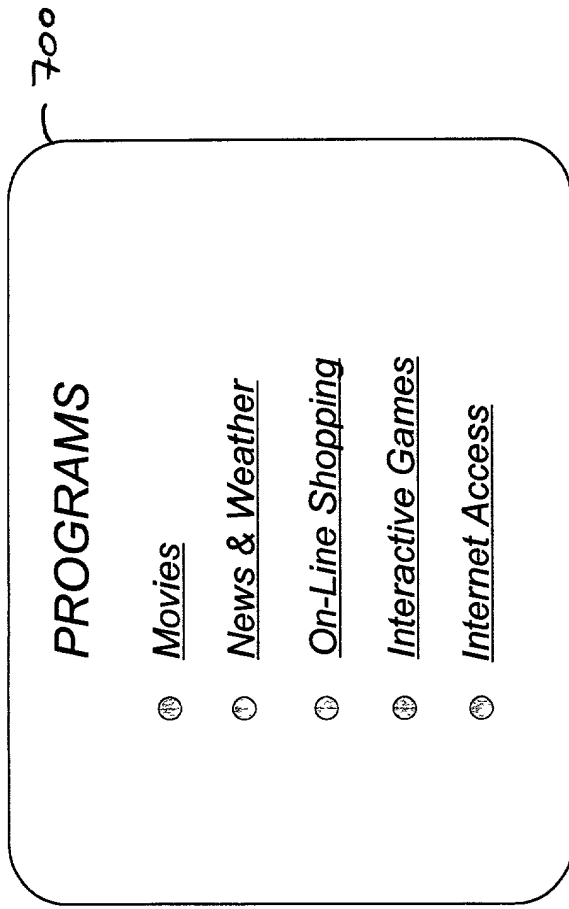


FIGURE 6



**FIGURE 7**

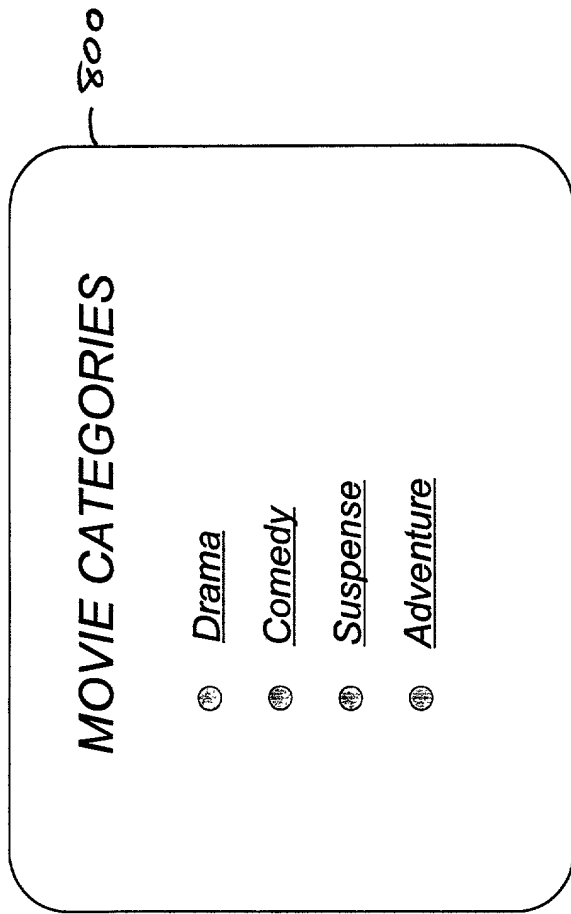


FIGURE 8

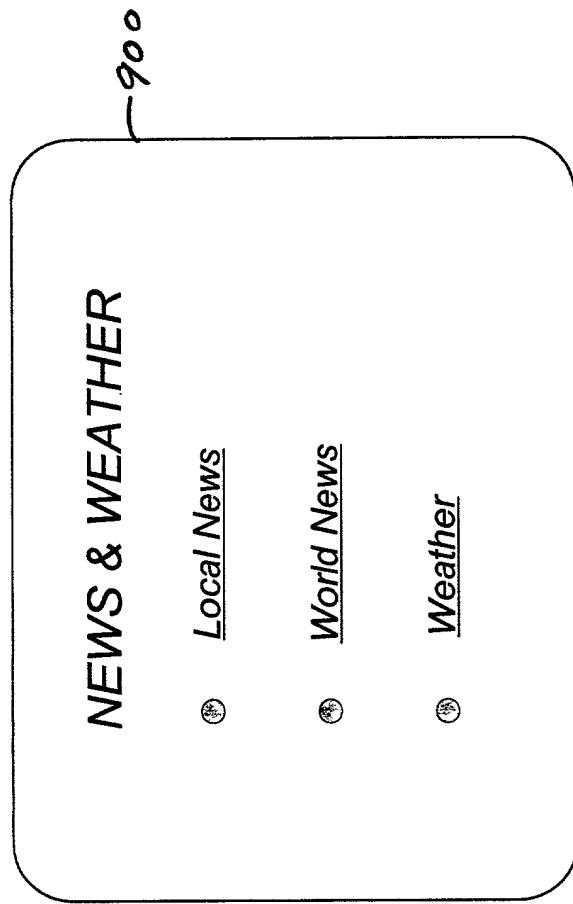


FIGURE 9

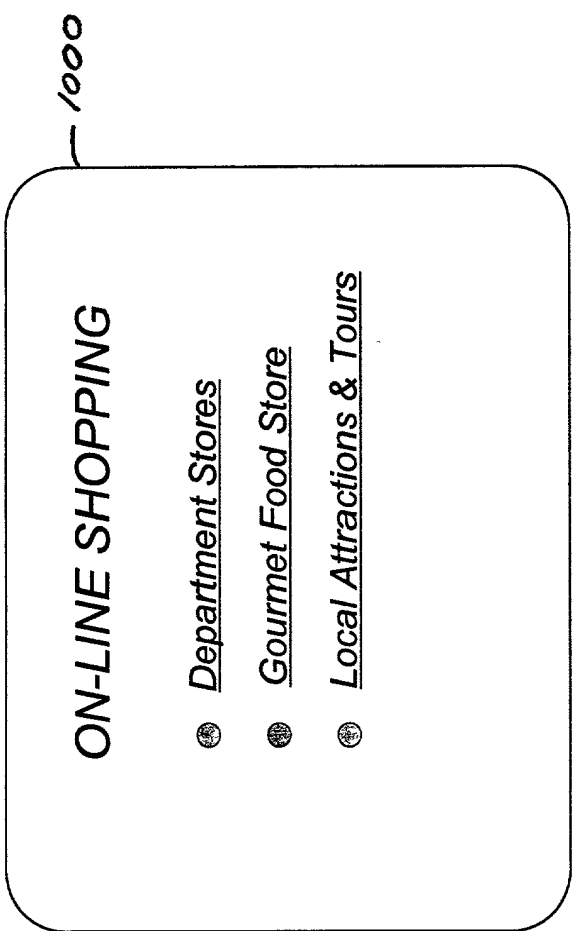


FIGURE 10



# DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

Attorney Docket No. 98-906

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

## METHOD AND SYSTEM FOR INTERACTIVE MULTIMEDIA

the specification of which (check one) ☐ is attached hereto. ☒ was filed on \_\_\_\_\_ as Appln. Serial No. \_\_\_\_\_ and was amended on \_\_\_\_\_ (if applicable). I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)		Priority Claimed
(Number)	(Country)	(Day/Month/Year filed)
		[ <input type="checkbox"/> ] Yes [ <input type="checkbox"/> ] No

I hereby claim the benefit under Title 35, United States Code, 119(e) of any United States provisional applications(s) listed below.

60/074,965	2/18/1998
(Application Number)	(Filing Date)

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date for this application:

(Appln. Serial No.)	(Filing Date)	(Status--patented, pending, abandoned)

98-906

I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

**Leonard C. Suchyta, Reg. No. 25,707 and Floyd E. Anderson, Reg. No. 33,825**

Address all telephone calls to Floyd E. Anderson at telephone no. (781) 466-4016

Address all correspondence to Leonard C. Suchyta  
GTE Service Corporation  
600 Hidden Ridge, HQE03G13  
Irving, TX 75038

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

FULL NAME OF SOLE OR FIRST INVENTOR Mark G. Prestoy

Inventor's signature Mark Frasier Date 2-17-99

Residence Westwood MA Citizenship US

Post Office Address 29 Colby Way, Westwood, MA 02090[illegible]